
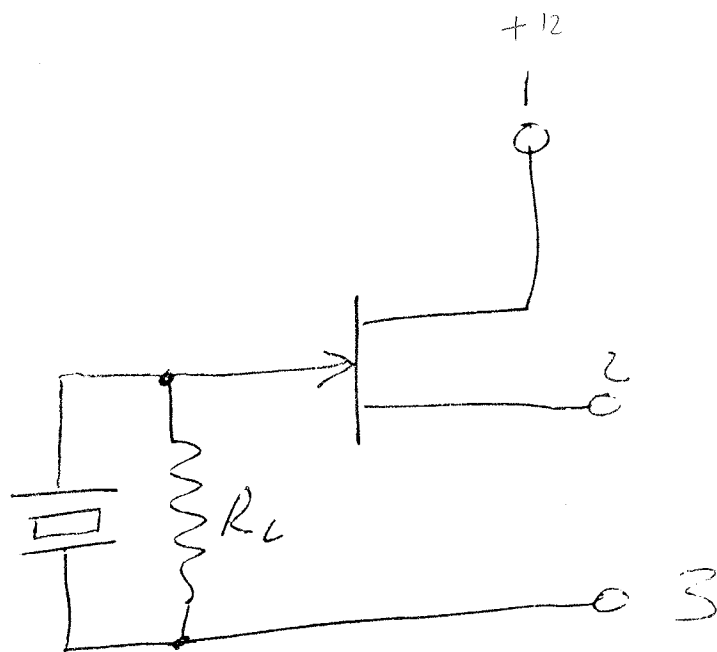


# PIEZOELECTRIC DETECTOR

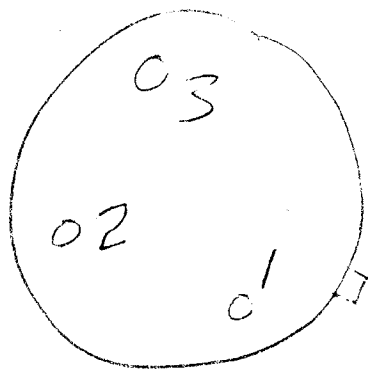

1. Apply +12VDC to pin 1, return to pin 3
2. Output between pins 2 & 3.